


Technical sheet

Ref. 010042

Adjustable guardrail for 75 cm wall penetration 1,5m high

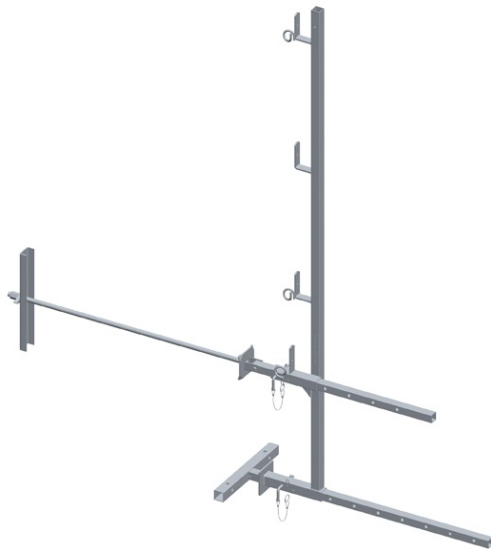

The guardrails are fixed on the side or at the bottom of the roof and carry the safety accessories (handrails, baseboards, nets) to provide full protection.

FEATURES

Can be placed directly from the roof with personal protective equipment
 Low investment cost
 Short assembly time
 Low administrative formalities
 Not bulky
 Best Seller
 Scalable with additional parts

SPECIFICATIONS

Length (mm)	2000
Width (mm)	400
Height (mm)	2000
Weight (kg)	0

Technical description

Temporary edge peripheral collective protection spaced at 3m max

New site and renovation with a slope of 10° maximum Adjusted at gutter

Overhang adjustment from 0 to 70 cm

Anchor point: by screw, U iron and nut

Placed on wall

Comprises:

- 1 post 1,50 m high (ref. 20227)
- 1 90 cm wall penetration 0 to 70 cm overhang (ref 20243 - composed of 1 articulated wall penetration - ref 20248, 1 but - ref. 30015 and 1 U iron - ref 20622)
- 1 spacer bar 1 m steel (ref. 20014)
- 1 high security pin + beta n°2 - ref. 20020

Actions : To work safely

Trades : Slate / Framework / Metal / Tile