


Technical sheet

Ref. 030303

Galvanized curved bar feed-through - Insulation thickness 10 cm

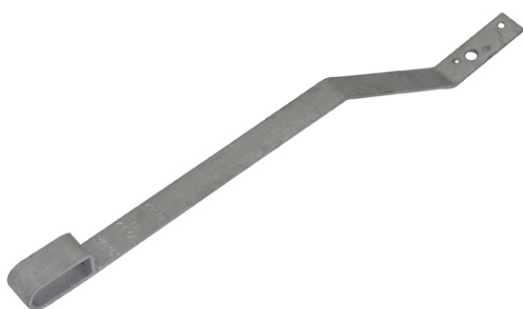

The safety hooks allow you to hang with a carabiner, a lanyard and a harness or a roof ladder to perform punctual interventions safely.

FEATURES

Dimos expertise designed bar feed-through
Ideal for all situations
Easy to set up and does not need additional sealing
Complies with EN517 Type A and Type B, and EN795 Class A2
Patented and trademarked system
Discreet solution for installing a PPE anchor system onto a roof

SPECIFICATIONS

Length (mm)	90
Width (mm)	30
Height (mm)	570
Weight (kg)	0,65

Technical description

Galvanised
Recommended attachments: DIMOS ring-shaped attachments, DIMOS Torx screws or DIMOS spindle pins
Meets the requirements of EN 795 Class C

Actions : To work safely

Trades : Slate / Framework / Tile