


## Technical sheet

Ref. 720033

## DIM ROLL tile red 390 flexible ventilation - L. 5 m - W. 390 mm

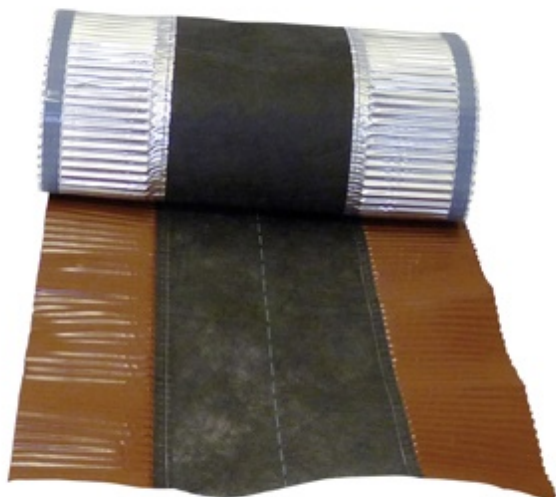

Roof ventilations ensure good air circulation between the bottom of the roof and the ridge and thus provide for the durability of the roof.

## FEATURES

Anti-tear  
 Constant airflow  
 Strong adhesion, even when wet or dusty (protection with disposable polyethylene tape)  
 Waterproof and breathable body  
 Easy to install: line for centring the ridge, cutting with scissors or cutter  
 UV and weather resistant

## SPECIFICATIONS

Lenght (mm)	5000
Width (mm)	390
Height (mm)	1
Weight (kg)	0,97

## Technical description

Fibre and aluminium ventilated ridge: ventilation holes with sealing edge  
 Pleated sleeve made of malleable aluminium with high covering performance (easy treading)  
 Sewn sleeve and body  
 Ventilation surface: 200 cm<sup>2</sup> to the ml

**Actions :** To ventilate

**Trades :** Slate / Tile