


## Technical sheet

Ref. 870052

## OSSMAN® roof scaffolding with dormer attachment

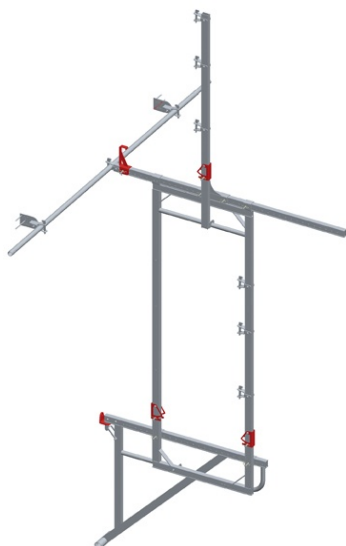

The roof scaffolding is attached to the base of the roof to support the floors and railings.

**FEATURES**

Light and simple to use

Adapts to all set-ups (Mansard roofs with dormer hooking or purlin, deck roofs with wall anchoring hook)

Can take 2 levels of floorboard simultaneously

**SPECIFICATIONS**

Lenght (mm)	2000
Width (mm)	400
Height (mm)	4820
Weight (kg)	0

**Technical description**

Maximum load: 360 Kg

In steel and aluminium 2 levels of floorboard

Comprises:

- 1 OSSMAN® aluminium console - ref. 880400
- 1 OSSMAN® aluminium frame 2,20 m - re. 880401
- 1 OSSMAN® aluminium post 1,50 m- ref. 880402
- 1 OSSMAN® floor steel stop - re. 20400
- 1 OSSMAN® handrail crosspiece - ref. 880403
- 1 OSSMAN® 3 steel handrail - ref. 20205
- 2 OSSMAN® handrail keyed anchorage - ref. 30200
- 6 zinc-plated Torx screws Ø 8 x 100 - ref. 30430
- 2 high security pins + beta n°2 - ref. 20020

**Actions :** To work safely

**Trades :** Slate / Framework / Metal / Tile