


Technical sheet

Ref. 880400

OSSMAN® aluminium roof scaffolding | 0,60m without guardrail

The roof scaffolding is attached to the base of the roof to support the floors and railings.

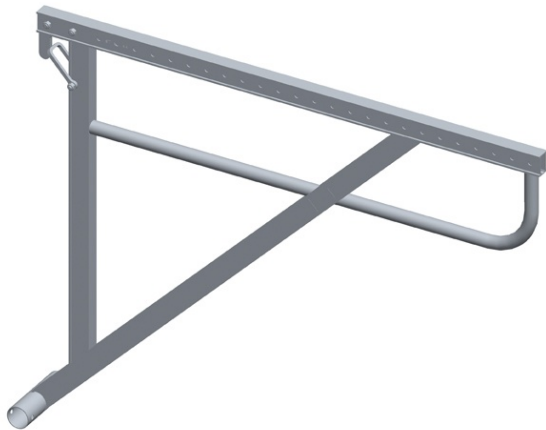

FEATURES

Light and simple to use
Adapts to all set-ups (Mansard roofs with dormer hooking or purlin, deck roofs with wall anchoring hook)
Can take 2 levels of floorboard simultaneously

SPECIFICATIONS

Lenght (mm)	200
Width (mm)	1140
Height (mm)	1400
Weight (kg)	7

Technical description

Made of aluminum

Actions : To work safely

Trades : Slate / Framework / Metal / Tile