


0,85m wall penetration steel facade bracket at 1m long

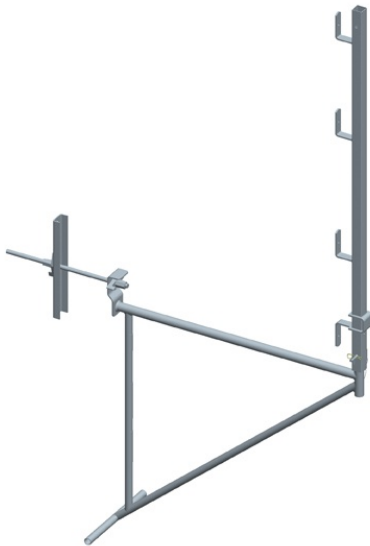

The roof scaffolding is attached to the base of the roof to support the floors and railings.

FEATURES

Efficient, light and easy to assemble,
Not limiting in terms of space and assembly
Suitable for any type of roof (tile, slate, zinc, sloping or flat, new or renovation) or for the installation of solar panels

SPECIFICATIONS

Lenght (mm)	1950
Width (mm)	400
Height (mm)	2500
Weight (kg)	0

Technical details

Comprises:

- 1 console 1 m wide height 0,90 m - ref. 20060
- 1 railing 1.50 m steel - ref. 20036
- 1 anchorage rod Ø 20 mm long 1 m thick for 0,85 m wall - ref. 30007
- 2 quick-screws Ø 20 mm - ref. 30014
- 1 U iron - ref. 20622
- 1 high security pin + beta n°2 - ref. 20020

Actions : To work safely

Trades : Slate / Framework / Metal / Tile

Dimos added value



PERFORMANCE THROUGH

We design the best solutions for Roofers, and innovate to meet the specific needs of each trade within the roofing business



TOOL UP YOU FROM A TO Z

We offer a broad product range tailored to local conditions and designed to meet Roofers' needs



BY YOUR SIDE DAY-IN, DAY-OUT

We provide all the services needed to assist Roofers on a daily basis