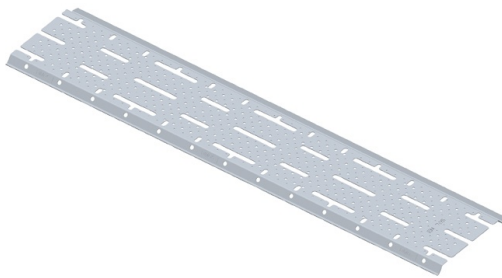


Technical sheet

Ref. 880000

Board only SECURIPLAC® L 3m | 60cm

This circulation path makes it possible to work on fragile substrates such as fibro-cement slabs. Usable as anchor point in EPI.

**FEATURES**

Very resistant and anti-slip
Light and foldable, easy to transport in a van
Quick to assemble without tools
Easy to decontaminate if treating asbestos

SPECIFICATIONS

Lenght (mm)	3000
Width (mm)	620
Height (mm)	50
Weight (kg)	13

Technical description

3 m board

Actions : To work safely / To move

Trades : Waterproofing